



ULTIMATE RESTAURANT RANGE 36" SERIES

Standard Features

- Commercial gas range 36" wide with a 37" high cooking top
- 4" Stainless steel front rail, stainless steel front and sides
- Front located manual gas shut-off to entire range
- One year No Quibble, 24/7 parts and labor warranty
- Factory installed Regulator
- Cast iron grate top will hold a 14" stock pot
- Standing pilot for open top burners (Optional N/C battery spark ignition)

Optional 33K Non-clog Burners (Burner Option 1)

- 6 patented, one piece, lifetime clog free, cast iron burners
- 33,000 BTU NAT

Optional Wavy Grates (Burner Option 2)

- Cast bowl design for better efficiency
- Allows full use of entire range top
- Available only with 27K BTU Non-clog burners

Optional Cast Iron Star/Saute' Burners (Burner Option 3)

- 33,000 BTU NAT
- Port arrangement allows for even distribution of flame

Optional Split Burner Configuration (Burner Option 4)

- 1 Star Saute Burner front and 1 Standard 33K burner rear

Optional 5 Burner Configuration (Burner Options 5 and 6)

- Combine 2 Pyromax Burners in the rear with either 3 Standard 33K (Opt 5) or 3 Star/Saute' 33K burners (Opt 6) in the front

Optional Pyromax Burners (Burner Option 7)

- 40,000 BTU NAT
- PATENTED high output, three piece, easy clean Non-clog burner
- Built in port protection drip ring
- Group of 4 burners available

Optional Griddle Top (L or R)

- 12" (left only), 24" or 36" Available
- 1/2" thick cold rolled steel griddle plate
- Manual or thermostatically controlled

Configure your own custom spec sheet at
www.BuildMyRange.com



(4361D Shown)

Job _____
Item# _____

CONSTRUCTION SPECIFICATIONS

Exterior Finish: Stainless steel front, sides and shelf standard.

RangeTop: - 27" deep cooking surface. Center-to-center measurements between burners not less than 12", side-to-side or front-to-back. A removable one piece drip tray is provided under burners to catch grease drippings.

Flue Riser: 22.5" flue riser standard with heavy duty shelf. Optional 10" and 5" flue riser available without shelf.

Oven Door: Counter balanced with heavy duty hinges,

Oven Interior: Double sided, full porcelain enamel oven cavity for superior cleanability and corrosion protection. Covered corners for easy cleaning and enhanced airflow eliminating hot/cold spots.

Legs: 6" stainless steel adjustable legs standard (casters optional)

Pressure Regulator: Factory installed.

Standard Oven Models (D)

45,000 BTU NAT oven with standing pilot and thermostat range of 175°F to 550°F (79°C to 288°C). Porcelain enamel interior measuring 14" high x 26" wide x 26.5" deep. Full sized pans fit both ways. One rack with two position side rails.

Convection Oven Models (A):

32,000 BTU NAT convection oven with standing pilot and thermostat range of 175°F to 550°F (79°C to 288°C). Porcelain enamel interior measuring 14" high x 26" wide x 24" deep. Three racks with five position side rails. 1/2 hp, 1725 rpm, 60 cycle, 115V AC, high efficiency, permanent split phase motor with permanent lubricated ball bearings, overload protection and Class "B" insulation. On/Off switch to allow CO base to operate as a standard oven.

Stainless Steel Cabinet (C)

Stainless steel cabinet base. Optional no-charge doors that open from the center.

Standard Oven with Infrared Broiler (R)

Standard Oven (see D at left), with 9,500 BTU broiler in oven.

Hybrid Electric Standard Oven (HxxxxD)

4.5kW electrically heated oven, with all the same base features of the gas standard oven at left (D)

Hybrid Electric Convection Oven (HxxxxA)


6kW electrically heated oven, with all the same base features of the gas standard oven at left (A)

Available Base Combinations

D, A, C, R, HxxxxD, HxxxxA



Dimensions -in (mm)

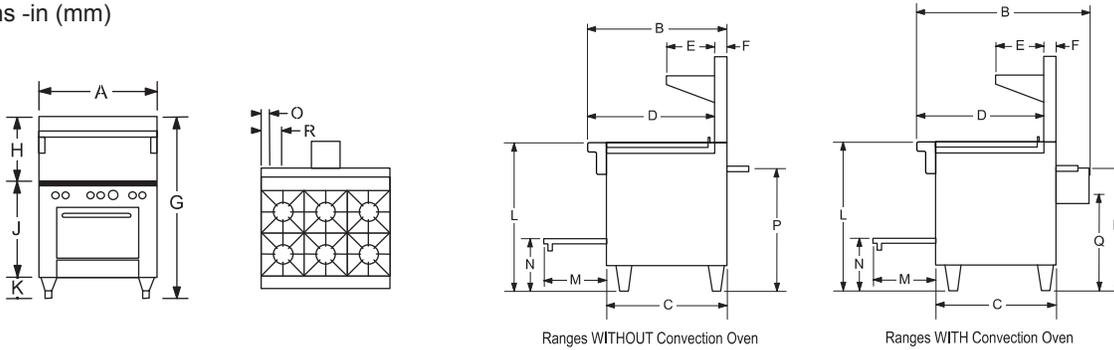

MODELS	EXTERIOR										COOK TOP	DOOR OPENING	OVEN BOTTOM	3/4" GAS CONN.	ELECTRIC		
	WIDTH A	DEPTH B	C	D	E	F	G	H	J	K					L	M	N
436_D, 436_R, H436_D	36.50" (927)	34.00" (864)	29.75" (756)	31.00" (787)	12.00" (305)	2.75" (70)	59.50" (1511)	22.50" (572)	31.00" (787)	6.00" (152)	37.00" (940)	15.50" (394)	13.00" (330)	3.25" (83)	30.25" (768)	-	-
436_A, H436_A	36.50" (927)	44.50" (1130)	29.75" (756)	31.00" (787)	12.00" (305)	2.75" (70)	59.50" (1511)	22.50" (572)	31.00" (787)	6.00" (152)	37.00" (940)	15.50" (394)	13.00" (330)	3.25" (83)	30.25" (768)	24.00" (610)	6.00" (152)

MODELS	OVEN INTERIOR			CRATE SIZE			CUBIC VOLUME	CRATED WEIGHT
	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
436_D, 436_R, H436_D	26.00" (660)	26.50" (673)	14.00" (356)	58.00" (1473)	48.00" (1219)	44.00" (1118)	132.3 cu. ft 3.75 cu.m.	660 lbs. 300 kg.
436_A, H436_A	26.00" (660)	24.00" (610)	14.00" (356)					

Configure your own custom spec sheet at www.BuildMyRange.com

UTILITY INFORMATION

BTUs EACH BURNER	STD NON-CLOG	STAR/SAUTE'	WAVY NON-CLOG	PYROMAX	(A) STD OVEN PER CAVITY	(D) CNV OVEN PER CAVITY	GRIDDLE 24"	GRIDDLE 36"	GRIDDLE 48"	RAISED GRIDDLE/ BROILER	HOT TOP 24"
NAT	33K	33K	27K	40K	45K	32K	48K	64K	80K	24K/9.5K	24K
LP	24K	24K	24K	31K	40K	30K	48K	64K	80K	24K/9.5K	24K

GAS:

- One 3/4" female connection.
- Required minimum inlet pressure
 - Natural gas 4" W.C.
 - Propane gas 10" W.C.

ELECTRICAL: (for Gas models with convection ovens)

- Standard -115/60/1 furnished with 6' cord with 3-prong plug. Total max amps 3.8 per convection oven base.
- Optional -208/60/1, 50/60/1 or 3 phase. Supply must be wired to junction box with terminal block located at rear. Total max amps 2.6

ELECTRICAL: (For Optional Hybrid Electric Ovens)

H436_D - 208/60/1- 39 amps, 220/60/1-37 amps, 240/60/1-34 amps
 H436_A - 208/60/1-32 amps, 220/60/1-31 amps, 240/60/1-27 amps

MISCELLANEOUS

- If using Flex-Hose, the I.D. should not be smaller than 3/4" and must comply with ANSI Z 21.69
- If casters are used with flex hose, a restraining device should be used to eliminate undue strain on the flex hose
- For installation on combustible floors (with 6" high legs) and adjacent to combustible walls, allow 6" clearance.
- Recommended - Install under vented hood
- Check local codes for fire, installation and sanitary regulations.
- If the unit is connected directly to the outside flue, an A.G.A approved down draft diverter must be installed at the flue outlet of the oven.
- Two speed motors are not available on Restaurant Range Convection Ovens.

NOTICE: Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

OPTIONS AND ACCESSORIES

- 5" flue riser
- 10" Flue Riser
- 3/4" quick disconnect with flexible hose complies with ANSI Z 21.69 (specify 3ft, 4ft, 5ft)
- Casters-all swivel-front with locks
- Hot Top plate - plate replaces 2 Open burners
 - Limit 1 Hot Top
- Cabinet Base
- Various salamander & cheesemelter mounts available. (Please refer to the price list)
- Extra Oven Racks
- Rear step up burners
- Battery spark ignition offered at no charge for open top, griddle and oven base pilots
- Flame Failure for open top burners available on 4361__ and 4362__ models only

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**



1100 Old Honeycutt Road, Fuquay-Varina, NC 27526
(919) 762-1000 www.southbendnc.com